

EP Analog Displacement Sensor

50–2500 mm Stroke, 0.0065% FS (min. 10 μ m) resolution, IP65, Non-Contact,

Features

Compact structure, convenient disassembly and assembly

Linear measuring, absolute position output

Never wear and tear, not affected by power failure

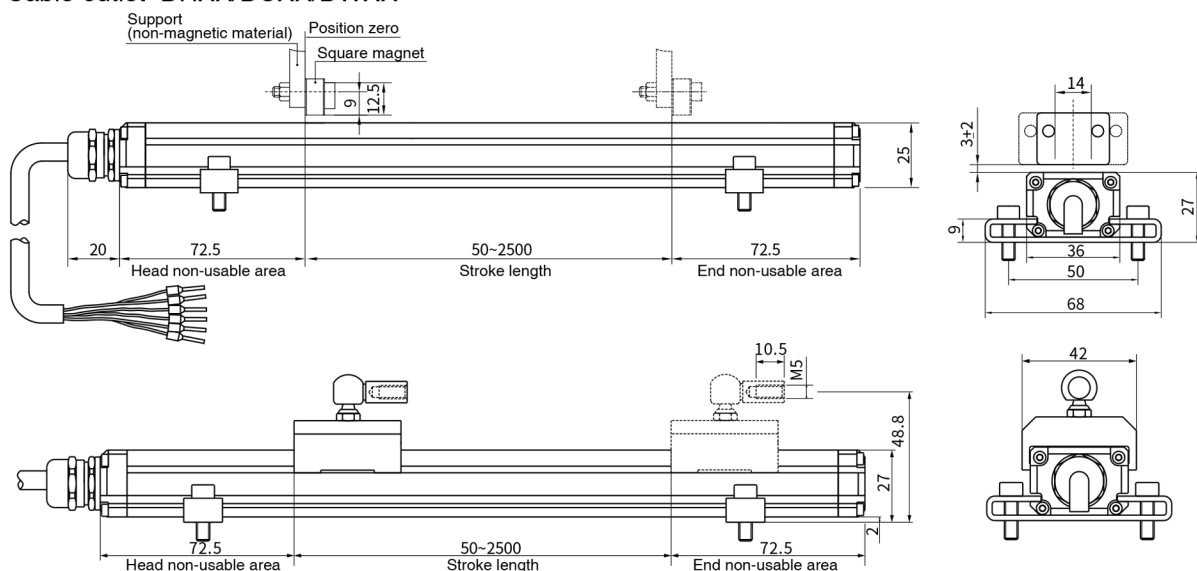
Replaceable: LVDT, electronic ruler, encoder, etc.

Non-contact, never-wear measurement ensures long service life and minimal maintenance.

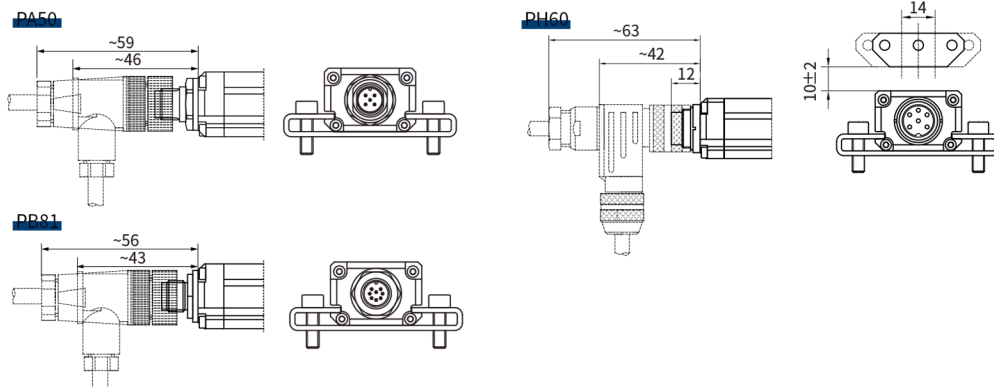
Technical Characteristics

► Structural shape

- Cable outlet DHXX/DUXX/DWXX



- Connector PA50/PB81/PH60



EP Analog Displacement Sensor

Wiring and pin definition

PA50 pin arrangement	Cable color3*	Function definition
 (facing the sensor head)	1 Brown	+24Vdc±20% power supply
	2 White	GND (power supply circuit)
	3 Blue	Magnet ring position signal+
	4 Black	Magnet ring position signal-
	5 Grey	Sensor programming line

Note:* Cable color 1: Cable PUR sheath, black, -20~90°C

* Cable color 2: Cable PVC sheath, orange, -20~105°C

* Cable color 3: Cable PUR Sheath, Black, -40~85°C

Note:The shield wire of the shielded cable is grounded

PH60 pin arrangement	Cable color1*	Cable color2*	Function definition
 2-wire system (facing the sensor head)	1 Blue	Grey	Magnet ring position signal+
	2 Green	Pink	Magnet ring position signal-
	3 Yellow	Yellow	Sensor programming line
	4 White	Green	Sensor programming line
	5 Red	Brown	+24Vdc±20% power supply
	6 Black	White	GND (power supply circuit)

PB81 pin arrangement	Function definition
 (facing the sensor head)	1 Do not connect
	2 Magnet ring position signal-
	3 Do not connect
	4 Sensor programming line
	5 Magnet ring position signal+
	6 GND (power supply circuit)
	7 +24Vdc power supply (-20%~+20%)
	8 Sensor programming line

▶ EP Analog Output-Product Parameters

• Input

Measuring data	Position magnet ring
Stroke length	50~2500 mm, others can be customized according to needs

• Output

Current	0 ~ 20mA or 4 ~ 20mA (min/max load 0/500Ω)
Voltage	0 ~ 10Vdc or 0~5Vdc (minimum load resistance ≥ 10KΩ)
Resolution	14-bit D/A or 0.0065% of full scale (minimum 10μm)
Nonlinearity	<±0.03% of full scale
Repeatability	<±0.005% of full scale
Update time	1ms(range ≤ 1m) 2ms(1m<range ≤ 2m) 3ms(2m<range ≤ 3m)
Hysteresis	<10μm

• Operating conditions

Magnet velocity	Arbitrary
Protection class	IP65
Operating temperature	-40℃ ~ +85℃
Temperature coefficient	<30ppm/℃
Humidity/dew point	Humidity 90%, no condensation
Shock index	GB/T2423.5 50g(11ms)
Vibration index	GB/T2423.10 10g/10~2000Hz

EMC test	GB/T17626.2 Anti-interference Degree of Electrostatic Discharge, Grade 4, Class A
	GB/T17626.3 Radiation Anti-interference Degree of Radio Frequency Electromagnetic Field, Grade 3, Class A
	GB/T17626.4 Anti-interference Degree of Electrical Fast Transient Train, Grade 4, Class A
	GB/T17626.6 RF Field Induced Conducted Disturbance Immunity, Grade 2, Class A
	GB/T17626.8 Power Frequency Magnetic Field Immunity, Grade 3, Class A
	CE certification

• Electrical Connections

Input voltage	+24Vdc±20%
Power consumption	<80mA
Polarity protection	Maximum-30Vdc
Overvoltage protection	Maximum36Vdc
Insulation resistance	>10MΩ
Insulation strength	500V





• Construction and Materials

Measuring rod	Aluminum profile
Installation	Any direction, clamp installation
Position magnet	Square magnet, trapezoidal magnet
Outgoing mode	Cable outlet (scattered connection), connector (M16 or M12 connector)



EP Analog Displacement Sensor

EP Analog Output - Common Options











Plug assembly cable

Accessory name/model	Dimensions	Description
Analog wiring cable assembly Order No.:AST-Mxxx-H01 (U01)		Mxxx denotes cable length in meters; H01-6-pin PUR orange sheath, temperature-resistant-20~90°C cable assembly; U01-6-pin PVC orange sheath, temperature resistance -20~105°C cable assembly.
Analog wiring right angled cable assembly Order No.:AST-Mxxx-H03 (U03)		Mxxx denotes cable length in meters; H03-6-pin PUR orange sheath, temperature-resistant -20~90°C cable assembly; U03-6-pin PVC orange sheath, temperature resistance -20~105°C cable assembly.
Analog output cable assembly Order No.:AST-Mxxx-W06		Mxxx denotes cable length in meters; W06-5-pin PUR black sheath, temperature -40~80°C cable assembly.
Analog output right angled cable assembly Order No.:AST-Mxxx-W05		Mxxx denotes cable length in meters; W05-5-pin PUR black sheath, temperature -40~80°C cable assembly.

Finished plug cable

Accessory name/model	Dimensions	Description
M12 female connector Order No.:521801-2 (3/5/10)		PUR black sheath, line core 1 brown, 2 white, 3 blue, 4 black, 5 gray, temperature resistance-40°C~80°C.
M12 Right angle female connector Order No.:521804-2 (5)		PUR black sheath, line core 1 brown, 2 white, 3 blue, 4 black, 5 gray, temperature resistance-40°C~80°C.

Magnet ring/floating ball

Accessory name/ model	Dimensions	Accessory name/ model	Dimensions	Description
Slider Magnet Order No.:211517		Square Magnet Order No.:288508		One square magnet 211508, one square magnet gasket 211529 (thickness 5mm), two M4X20 socket screws
Square magnet Order No.:211508		Trapezoidal magnet kit Order No.:288514		One trapezoidal magnet 211514, one trapezoidal magnet gasket 211530 (thickness 5mm), three M4X20 socket screws
Square magnet gasket Order No.:211529		Mounting clamp kit Order No.:211561		One mounting clamp, two M5X16 socket screws
Trapezoidal magnet Order No.:211514		Mounting clamp kit (With insulation) Order No.:211801		One mounting clamp, two M5X16 socket head cap screws, four insulating washers
Trapezoidal magnet gasket Order No.:211530		Slider Magnet Kit Order No.:288517		One slider Magnet 211517, one M5x25Screw, Two M5 Nuts

Note: For other accessories, please refer to general options

EP Analog Output-Selection Guide

EP - M - C - - 1 -

01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19

01 - 02 Sensor shell form

E P Overall profile structure series

03 - 07 Range (0050~2500mm, others can be customized as needed)

0050~0500mm step length 5mm

0750~1000mm step length 25mm

1000~2500mm step length 50mm

08 - 09 Magnet form

C 2 Slider magnet (211517)

C 3 Square magnet (211508)

C 4 Trapezoidal magnet (211514)

10 - 13 Connection form

10 - 11 Cable outlet mode

D H PUR sheath, orange, -20~90°C, end scattered, Cable color 1

D U PVC sheath, orange, -20~105°C, end scattered, Cable color 2

D W PUR sheath, black, -40~85°C, end scattered, Cable color 3

12 - 13 Cable length, 01~99 units: m (cable outlet mode)

10 - 13 Connector form

P A 5 0 M12 5-pin male socket, plug cable needs to be selected separately

P H 6 0 M16 6-pin male socket, plug cable needs to be selected separately

P B 8 1 M12 8-pin male socket

14 - 17 Signal output mode

14 - 15 Signal output mode

A 0 Current output, 4 ~ 20mA

A 1 Current output, 20 ~ 4mA

A 2 Current output, 0 ~ 20mA

A 3 Current output, 20 ~ 0mA

V 0 Voltage output, 0 ~ 10V

V 1 Voltage output, 10 ~ 0V

V 4 Voltage output, 0 ~ 5V

V 5 Voltage output, 5 ~ 0V

16 Reserved bit

1 Single magnet ring

17 No magnet ring state

A Keep the original value

B Maximum value

C Minimum value

18 - 19 Non-usable area at head and end

B 1 72.5mm+72.5mm

D 2 73mm+73mm

Selection example

For example: EP-M0300-C0-PB81-A01B-B1

Indicates: EP integral profile structure, mounting clamp installation, 300mm Stroke length, no magnet block, M12 connector outlet form, current output of 4~20mA, output value of non-magnet ring less than 4mA, non-usable area at head and end of 72.5 mm+72.5mm.

Supply list

Sensor, certificate, instruction manual, optional parts (optional separately)